


Butterfly valves motorizable - Operating with handwheel


Mounting on headstock without indicator - Extension tube 3 to 6 m 33/42 (Ø20) or 50/60 (Ø30)

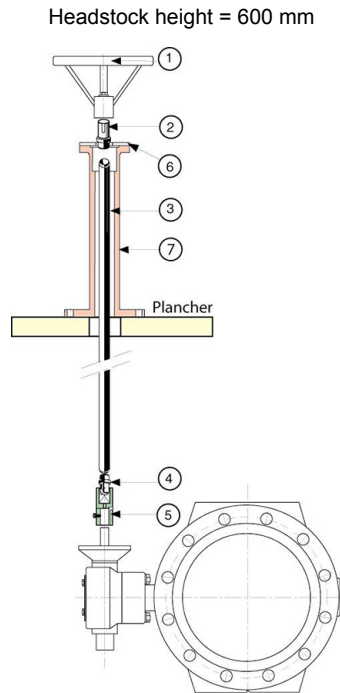

Item	Description	Number	References
	Mounting on headstock without indicator - Extension tube 3 to 6 m 33/42 (Ø20) or 50/60 (Ø30)		
1	Handwheel (delivered with headstock) - See RSEVPXXACC625	1	[RSEVPXXACC625]
2	Adaptor to be welded (cylindrical keyed) - Ø 20	1	162165
2	Adaptor to be welded (cylindrical keyed) - Ø 30	1	162166
3	Extension tube length 3 m - Ø 20 (33/42)	1	162088
3	Extension tube length 3 m - Ø 30 (50/60)	1	162229
3	Extension tube length 4,5 m - Ø 20 (33/42)	1	162231
3	Extension tube length 4,5 m - Ø 30 (50/60)	1	162232
3	Extension tube length 6 m - Ø 20 (33/42)	1	162090
3	Extension tube length 6 m - Ø 30 (50/60)	1	162140
4	Adaptor to be welded square 28 - Ø 20 (33/42)	1	162077
4	Adaptor to be welded square 28 - Ø 30 (50/60)	1	163358
5	Operating coupling keyed Ø20 or Ø30 - See RSEVPXXACC600	1	[RSEVPXXACC600]
6	Plate protection with fixed bolts for headstock - Ø 20 (F10)	1	162295
6	Plate protection with fixed bolts for headstock - Ø 30 (F14)	1	184276
7	Headstock without indicator - H = 600 mm - Ø 20 (F10)	1	162156
7	Headstock without indicator- H = 600 mm - Ø 30 (F14)	1	162157

Mounting on headstock with indicator - Extension tube 1,5 to 6 m 33/42 (Ø20) or 50/60 (Ø30)

Headstock height = 800 mm

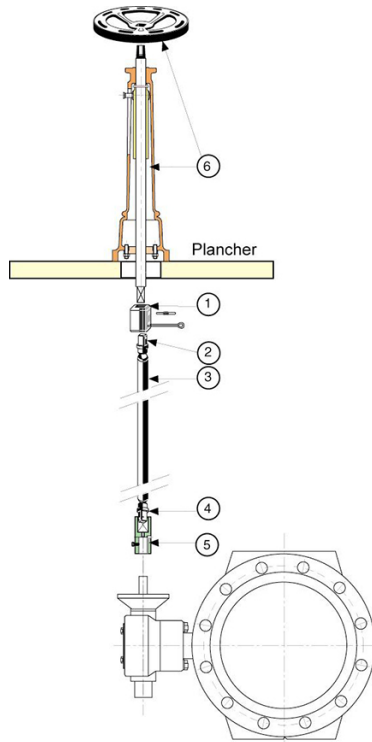

Item	Description	Number	References
	Mounting on headstock with indicator - Extension tube 1,5 to 6 m 33/42 (Ø20) or 50/60 (Ø30)		
1	Operating coupling square	1	RAA28GP
2	Adaptor to be welded square 28 - Ø 20 (33/42)	1	162077
2	Adaptor to be welded square 28 - Ø 30 (50/60)	1	163358
3	Extension tube length 1,5 m - Ø 20 (33/42)	1	162193
3	Extension tube length 1,5 m - Ø 30 (50/60)	1	162194
3	Extension tube length 3 m - Ø 20 (33/42)	1	162088
3	Extension tube length 3 m - Ø 30 (50/60)	1	162229
3	Extension tube length 4,5 m - Ø 20 (33/42)	1	162231
3	Extension tube length 4,5 m - Ø 30 (50/60)	1	162232
3	Extension tube length 6 m - Ø 20 (33/42)	1	162090
3	Extension tube length 6 m - Ø 30 (50/60)	1	162140
4	Adaptor to be welded square 28 - Ø 20 (33/42)	1	162077
4	Adaptor to be welded square 28 - Ø 30 (50/60)	1	163358
5	Operating coupling keyed Ø20 or Ø30 - See RSEVPXXACC600	1	[RSEVPXXACC600]
6	Headstock with indicator delivered with handwheel - H = 800 mm - See RSEVPXXACC725	1	[RSEVPXXACC725]